

UDC 519:87

DIAGNOSING KIDNEY IMAGING WITH DEEP LEARNING

Iskandarova S.N.¹, Makhkamova D.A.²

¹Tashkent University of information technologies named after Muhammad al-Khwarizmi, Tashkent, Uzbekistan

²Samarkand branch of Tashkent University of information technologies named after Muhammad al-Khwarizmi, Samarkand, Uzbekistan
sayyora5@mail.ru, maxkamova.dilbar.1991@gmail.com

Abstract. *Ultrasound images can be used to diagnose kidney disease: identify systemic abnormalities such as cysts, stones, and infections, and provide information about kidney function. This article focuses on the selection of appropriate features for efficient classification of normal and abnormal kidney images. In diagnosing cardiac images, grayscale transformation has been used to classify abnormal images in the kidneys. A data set formed by a convolutional neural network was trained. 2 classes were created and on their basis a recognition result of 89% was achieved. The prevalence of chronic kidney disease (CKD) increases annually in the present scenario of research. One of the sources for further therapy is the CKD prediction where the Machine learning techniques become more important in medical diagnosis due to their high accuracy classification ability. In the recent past, the accuracy of classification algorithms depends on the proper use of algorithms for feature selection to reduce the data size. In this paper, Heterogeneous Modified Artificial Neural Network (HMANN) has been proposed for the early detection, segmentation, and diagnosis of chronic renal failure on the Internet of Medical Things (IoMT) platform. Furthermore, the proposed HMANN is classified as a Support Vector Machine and Multilayer Perceptron (MLP) with a Backpropagation (BP) algorithm. The proposed algorithm works based on an ultrasound image which is denoted as a preprocessing step and the region of kidney interest is segmented in the ultrasound image*

Keywords: *image contrast, histogram, image classification, convolutional neural network, CNN (convolutional neural network), neural network.*

I. INTRODUCTION

The kidneys are one of the most important organs for a person. Early detection of the disease is important. In humans, the kidneys in a certain sense act as a filter. In addition, its failure leads to changes in a number of human activities. It affects the blood system and other organs as well. Therefore, a number of diseases can be prevented by pre-diagnosing the symptoms of kidney disease [1].

Gunasundari et al. [2] explained the importance of a computer diagnostic system in cancer detection. The stage of image processing in the classification of signs is one of the main stages of diagnostics. Feature selection used to be a difficult task for complete tasks, but now we can solve it with image processing and parallel computing algorithms.

Ode et al. [3] proposed the use of early imaging markers to predict future renal failure, allowing the diagnosis of the

disease in infants with posterior urethral valves. Imaging, sponsored by the National Institutes of Health, analyzed serial early postnatal images of cases. At the last follow-up, baseline study results and renal function were dichotomously separated based on glomerular tissue. They determined the importance of circulatory rate and the need for renal replacement therapy. Evaluation of the quantity and quality of the kidney parenchyma allows timely diagnosis of the disease, and early elimination can save a person's life.

Subramanya et al. [4] described a computer-aided classification system for three classes of kidneys, i.e., normal, benign kidney disease (MRD) and cyst detection using B-mode imaging. Thirty-five B-mode kidney images were used, consisting of 11 normal images, eight MRD images, and 16 cystic images. Regions of interest (ROI) were determined by a parenchymal renal radiologist in normal and MRD patients. For the classification task of assessing the contribution of textural features, a good diagnostic result was achieved using the

eight-speckle decontamination method, which was pre-processed with original images from images without defects.

Based on this, we found out that the choice of neural network architecture for imaging, pre-processing and diagnostics is important.

When diagnosing kidney imaging:

- 1) Extracting the main features of images in machine learning;
- 2) Choice of CNN architecture for image training.

II. METHODOLOGY

Kidney disease is important to human health and can affect other organs as well. In addition, it affects the blood system, spinal cord and nervous system. It is important to predict the pathological condition of the kidney in advance. Deep learning technology is a CNN, and the main thing is to form a correct and complete data set.

Insufficient data set does not lead to an accurate diagnosis. We also use artificial data collection methods.

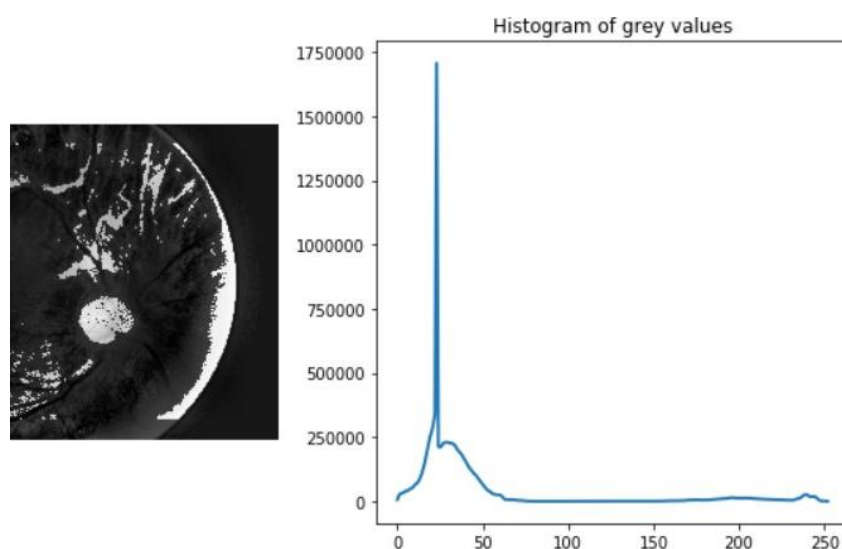


Fig. 1. Histogram of pixel distribution of grayscale images

2.1 Histogram equation

We used the well-known Adaptive Histogram Equalization technique with contrast limiting to equalize the histograms in the image. This prevents other values from appearing in our calculations of excessively high numerical values. The same method was used for the contrast histogram of the image, which led to the possibility of correctly assigning hidden or exaggerated values to the average state.

Images are enhancements to the edges of local objects.

After pre-processing the image, the dataset is divided into training and test sets, each containing 80% and 20% of the data.

Based on the generated data set, a functional learning structure with a convolutional neural network was developed.

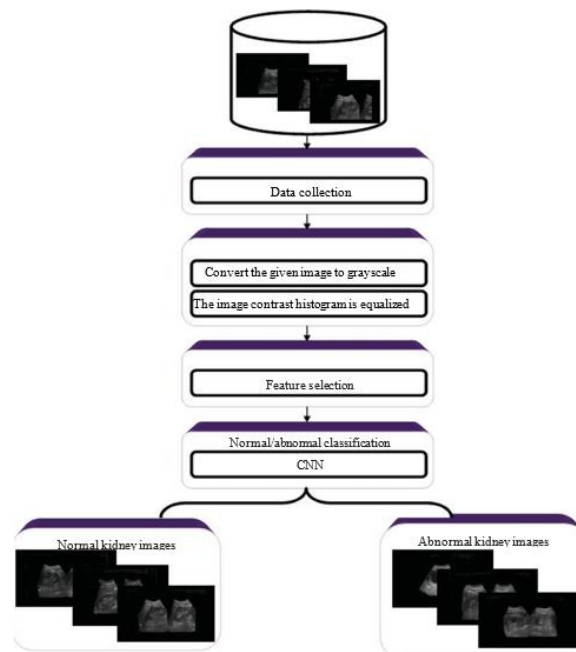


Fig. 2. Functional diagram of the software

Classification accuracy obtained for training:

80% of the training data set was trained to train the neural network.

Whereas the test data contained a 20% data set and achieved 88% accuracy.

In recent years, great progress has been made in the field of automated systems for the detection of kidney diseases. Ultrasound systems have made it possible

to obtain more volumetric and qualitative data when imaging patients. The use of feature extraction, image analysis, and image recognition methods for classification increases the efficiency of neural networks.

The graph shown in figure 3 shows the result obtained from training with validation enabled, which displays the accuracy of the model.

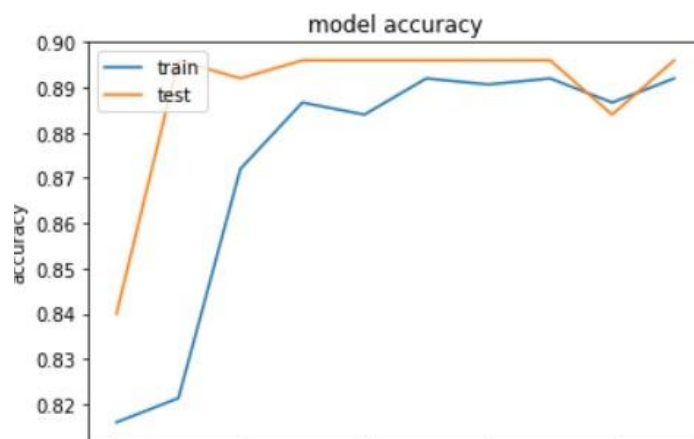


Fig. 3. Graph of model accuracy

On the other hand, for the first iteration of the test data, the loss is about 0.67, which includes 0.35 periods for downsizing.

On figure 4 shows an iterative loss learning graph that provides a visual explanation of the model.

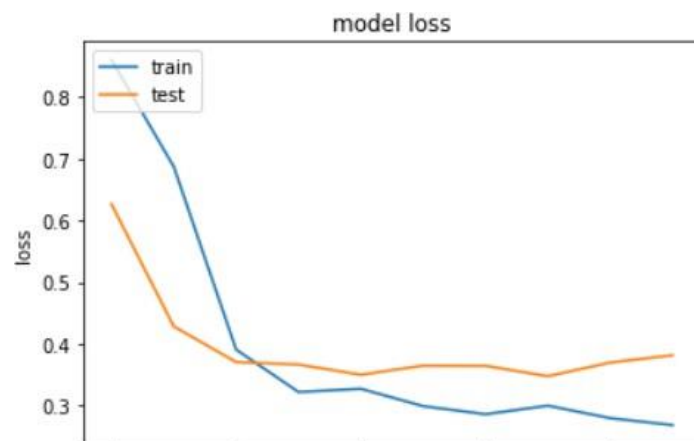


Fig. 4. Graph of the loss function

The Adam optimizer played an important role in optimization. This model attempts to adjust the weights by generally observing losses that decrease as the number of training iterations increases.

III. CONCLUSION

By diagnosing with CNN, we will be able to detect and treat kidney diseases in advance. The choice of image is important. Pre-processing techniques such as limited adaptive histogram equalization were used after data augmentation to create the dataset. For convolutional neural networks, 89 percent diagnostic

accuracy was achieved by using transfer learning for VGG16. We can also notice that the minimal log loss significantly improved the classification accuracy of the model. From the results, we can conclude that the model achieved an accuracy of 89% with fewer rules.

REFERENCES

[1] M. U. Akram, S. Khalid, and S. A. Khan, "Identification and classification of microaneurysms for early detection of diabetic retinopathy,"

- Pattern Recognition, vol. 46, no. 1, pp. 107–116, 2013.
- [2] S. Gunasundari, S. Janakiraman and S. Meenambal, Velocity bounded Boolean particle swarm optimization for improved feature selection in liver and kidney disease diagnosis, *Exp. Syst. Appl.* 56 (2016), 28–47.
- [3] A. Gupta and Karmeshu, Efficacy of Pearson distributions for characterization of gray levels in clinical ultrasound kidney images, *Signal Image Video Process.* 9(2013), 1317–1334.
- [4] C. S. Gur and M. Top, Regional clustering of medical imaging technologies, *Comput. Hum. Behav.* 61 (2016), 333–343.
- [5] M. -K. Hu, Visual pattern recognition by moment invariants. *IRE T. Inform. Theor.* 8.2(1962), 179–187.
- [6] J. Huang, X. Yang, Y. Chen and L. Tang, Ultrasound kidney segmentation with a global prior shape, *J. Vis. Commun. Image Represent.* 24 (2013), 937–943.
- [7] T. Mangayarkarasi and D. N. Jamal, PNN-based analysis system to classify renal pathologies in kidney ultrasound images, in: *Computing and Communications Technologies (ICCCT), 2017 2nd International Conference on IEEE, Chennai, 2017.*
- [8] Fuzhe Ma, Tao Sun, Lingyun Liu, Hongyu Jing. Detection and diagnosis of chronic kidney disease using deep learning-based heterogeneous modified artificial neural network. *Future Generation Computer Systems.* Volume 111, October 2020, Pages 17-26.
- [9] Xu Fu, Huaiqin Liu, Xiaowang Bi, and Xiao Gong. Deep-Learning-Based CT Imaging in the Quantitative Evaluation of Chronic Kidney Diseases. *Journal of Healthcare engineering.* 2021 Oct 28. doi: 10.1155/2021/3774423.
- [10] John K., Weaver L, Karen Milford, Mandy Rickard . Deep learning imaging features derived from kidney ultrasounds predict chronic kidney disease progression in children with posterior urethral valves. *National Library Of Medicine.* 2023 Mar;38(3):839-846. doi: 10.1007/s00467-022-05677-0. Epub 2022 Jul 22.

Поступила в редакцию 29.12.2022

Citation: Iskandarova S.N., Makhkamova D.A. 2023. Diagnosing kidney imaging with Deep Learning. *International Journal of Theoretical and Applied Issues of Digital Technologies.* 1(3): 70-76.

ДИАГНОСТИКА ВИЗУАЛИЗАЦИИ ПОЧЕК С ПОМОЩЬЮ DEEP LEARNING

Искандарова С.Н.¹, Махкамова Д.А.²

¹Ташкентский университет информационных технологий имени Мухаммада ал-Хорезми, Ташкент, Узбекистан

²Самаркандский филиал Ташкентского университета информационных технологий имени Мухаммада ал-Хорезми, Самарканд, Узбекистан
sayyora5@mail.ru, maxkamova.dilbar.1991@gmail.com

Аннотация. Ультразвуковые изображения можно использовать для диагностики заболеваний почек: выявления системных аномалий, таких как

кисты, камни и инфекции, и предоставления информации о функции почек. В этой статье основное внимание уделяется выбору подходящих признаков для эффективной классификации нормальных и аномальных изображений почек. При диагностике изображений сердца преобразование оттенков серого использовалось для классификации аномальных изображений в почках. Обучался набор данных, сформированный сверточной нейронной сетью. Было создано 2 класса и на их основе достигнут результат распознавания 89%. Распространенность хронической болезни почек (ХБП) при данном сценарии исследований ежегодно увеличивается. Одним из источников для дальнейшей терапии является прогнозирование ХБП, где методы машинного обучения становятся более важными в медицинской диагностике из-за их высокой точности классификации. В недавнем прошлом точность алгоритмов классификации зависела от правильного использования алгоритмов выбора признаков для уменьшения размера данных. В этой статье гетерогенно модифицированная искусственная нейронная сеть (ГМИНС) была предложена для раннего обнаружения, сегментации и диагностики хронической почечной недостаточности на платформе Интернета медицинских вещей (ИМВ). Кроме того, предлагаемый ГМИНС классифицируется как машина опорных векторов и многослойный перцептрон (МП) с алгоритмом обратного распространения ошибки (ОР). Предлагаемый алгоритм работает на основе ультразвукового изображения, которое обозначается как этап предварительной обработки, и интересующая область почки сегментируется на ультразвуковом изображении.

Ключевые слова: контрастность изображения, гистограмма, классификация изображений, сверточная нейронная сеть, СНС (сверточная нейронная сеть), нейронная сеть.

DEEP LEARNING YORDALMIDA BUYRAK TASVIRLARI DIAGNOSTIKASI

Iskandarova S.N.¹, Maxkamova D.A.²

¹ Muhammad al Xorazmiy nomidagi Toshkent axborot texnologiyalari universiteti,
Toshkent, O'zbekiston

² Muhammad al Xorazmiy nomidagi Toshkent axborot texnologiyalari universiteti
Samarqand filiali, Samarqand, O'zbekiston
sayyora5@mail.ru, maxkamova.dilbar.1991@gmail.com

Annotatsiya. *Ultratovush tasvirlari buyrak kasalliklarini tashxislash uchun ishlatilishi mumkin: kistalar, toshlar va infektsiyalar kabi tizimli anormalliklarni aniqlash va buyraklar faoliyati haqida ma'lumot berish. Ushbu maqola normal va anormal buyrak tasvirlarini samarali tasniflash uchun mos xususiyatlarni tanlashga qaratilgan. Kardiyak tasvirlarni diagnostika qilishda buyraklardagi g'ayritabiiy tasvirlarni tasniflash uchun kul rang o'zgarishi ishlatilgan. Konvolyutsion neyron tarmog'i tomonidan yaratilgan ma'lumotlar to'plami o'qitildi. 2 ta sinf yaratildi va ular asosida 89% tan olish natijasiga erishildi. Ushbu tadqiqot ssenariysida surunkali buyrak kasalligi (SBK) tarqalishi har yili ortib bormoqda. Keyingi terapiya uchun manbalardan biri bu SBK prognozi bo'lib, bu yerda mashinali o'rganish usullari yuqori tasniflash aniqligi tufayli tibbiy diagnostikada muhimroq bo'lib bormoqda. Yaqin o'tmishda*

tasniflash algoritmlarining aniqligi ma'lumotlar hajmini kamaytirish uchun xususiyatlarni tanlash algoritmlaridan to'g'ri foydalanishga bog'liq edi. Ushbu maqolada Internet of Medical Things (IoMT) platformasida surunkali buyrak kasalligini erta aniqlash, segmentatsiyalash va diagnostika qilish uchun Geterogen modifikatsiyalangan sun'iy neyron tarmog'i (GMSNT) taklif qilingan. Bundan tashqari, tavsiya etilgan GMSNT qo'llab-quvvatlovchi vektor mashinasi va orqaga tarqalish (OT) algoritmiga ega ko'p qatlamli perseptron (KQP) sifatida tasniflanadi. Taklif etilayotgan algoritm ultratovush tasviriga asoslangan holda ishlaydi, u dastlabki ishlov berish bosqichi sifatida belgilanadi va buyrakning qiziqish doirasi ultratovush tasviriga bo'linadi.

Kalit so'zlar: *tasvir kontrasti, gistogramma, tasvir tasnifi, konvolyutsion neyron tarmoq, KNT (konvolyutsion neyron tarmoq), neyron tarmoq.*